

OGDEN

FLEXIBLE HARROW CARTS

WORKS WITH 1/2" OR 5/8" HARROW



13 sizes of Harrow Carts with versatile designs to match your specific needs.

Ogden Features and Benefits

- Pasture renovation by dethatching dead growth and breaking up heavy residue and straw to eliminate plugging of cultivation tools.
- Herbicide incorporation as it levels the ground and seals herbicide in for maximum killing action
- One-pass applications of herbicides when used behind your disc or field cultivator
- Works in fertilizer, manure or lime to both spread and maximize effectiveness
- Covers broadcasted seed for effective incorporation and excellent coverage to maximize germination
- Root aeration by breaking up clods and smoothing out cultivated ground
- Scarifies hay and pasture land by loosening crusted surface to stimulate new growth, prepare soil for seeding, and allow better moisture penetration
- Ring maintenance, for smooth well prepared traction on ball diamonds, race tracks, dirt and gravel roads, rodeo arenas, and more
- Grass and turf maintenance for dethatching, aerating, and seeding parks, golf courses, playing fields, and more
- Self-cleaning action spreads straw and heavy trash without plugging
- Saves time and fuel as the Harrow Cart can be pulled behind tractors, jeeps and/or pickups

For further information contact:
Ogden Metalworks, Inc.
PO Box 128
301 N. Marilyn Ave.
Ogden, Illinois 61859

web • www.ogdenmetalworks.com
email • ogdenmetalworks@ogdenmetalworks.com

PH: (217) 582-2552
Fax: (217) 582-2746


Sold and Distributed by:

OGDEN
METALWORKS, INC.




1. You choose the degree of penetration.


Depending on the direction in which the Harrow Sections are pulled, the Tines can become passive or aggressive. The front and rear Harrow Sections are independently adjustable allowing you to complete two jobs in one pass.

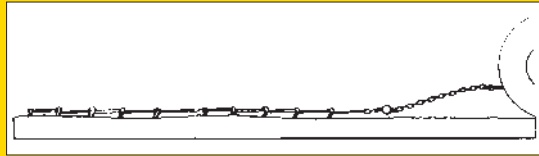


Aggressive action: Tines stand up at 75° angle.

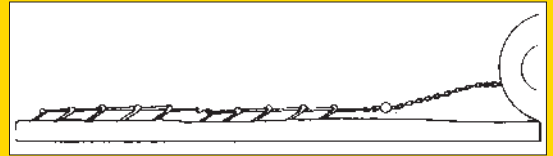

Light action: Reversed tines point further back.

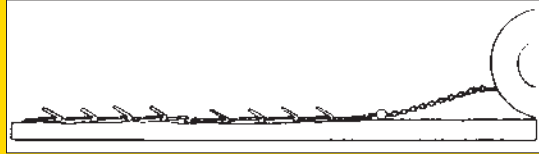

Minimum application: Turned over for smoothing effect.

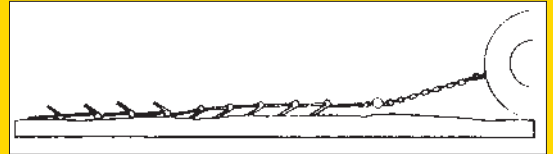

Combination: Front section to break up—back section flipped over to smooth.

2. You can be in and out of the field in no time.

All of our Harrow Cart models make it a breeze to get you ready for transport or field position. Simply fold or unfold.



3. You get 13 sizes of Carts to choose from.

There are 13 different sizes of Harrow Carts available to meet your specific needs.

Cart Size	Min. Working Width	Center Sect.	Wing Width	Sec. Req.		
				10'	6'	4'
16'	15' 0"	8'	4'	0	0	4
18'	17' 3"	10'	4'	1	0	2
20'	19' 6"	8'	6'	0	2	2
22'	21' 9"	10'	6'	1	2	0
24'	22' 6"	8'	8'	0	0	6
26'	24' 9"	10'	8'	1	0	4
28'	27' 0"	8'	10'	2	0	2
30'	29' 3"	10'	10'	3	0	0
32'	31' 6"	8'	12'	0	4	2
34'	33' 9"	10'	12'	1	4	0
36'	36' 0"	12'	12'	0	6	0
38'	37' 6"	14'	12'	1	4	1
42'	40' 6"	14'	14'	3	0	3

38' & 42' Carts come with Hydraulic Lift Cylinder and Hose Kits
38' & 42' Carts have Dual Wheel Mounts on center section (6 tires required)

Specifications:

- Standard Tongue: 17' 4" Long
- 3 1/2" Hyd. Lift Cyl. & Hose Kit, 38'–42' Carts
- Adjustable Tongue Clevis
- Hose Tip Holder
- Extra Tongue Jack Mount
- Manual Storage Canister

Options:

- 3" Hyd. Lift Cyl. & Hose Kit, 16'–36' Carts
- Hyd. Wing Fold Kit, all Carts
- Tires

Specifications and Options subject to change without notice

OGDEN
METALWORKS, INC.