




*Designed. Engineered. Remarkable Value.*

## **Electric Grapple for Sub-Compacts** **No Auxiliary Hydraulic Required**




**worksaver.com**  
*Engineered, Designed and Manufactured in the USA*



## Electric Grapple

No auxiliary hydraulics to operate the clamp on a grapple? No problem with Worksaver's (patent applied for) Electric Sub-Compact Grapple. All you need is a connection to the battery. Engineered for Sub-Compact tractors (up to 32-hp) with a loader to handle debris & so much more. The ESCG-48S and ESCG-48JD are opening up possibilities never before available to large and small property owners.

Heavy Duty power connectors with soft shell boot protector are standard.

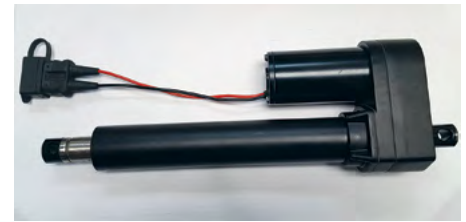

12-volt industrial actuator with 8-inch stroke, slip clutch protected for dependable operation.



Rocker switch allows the operator to control grapple movement with the touch of a finger.

Model	ESCG-48S	ESCG-48JD
Overall Width (in/mm)	49 / 1245	49 / 1245
Mount Type	Skid Steer	JD Hook & Pin
Overall Height Closed (in/mm)	41.5 / 1054	41.5 / 1054
Grapple Opening (in/mm)	31 / 787	31 / 787
Upper Grapple Width (in/mm)	28.25 / 718	28.25 / 718
Lower Grapple Width (in/mm)	49 / 1245	49 / 1245
Tine Spacing (in/mm)	9.25 / 235	9.25 / 235
Number of Tine/Grapple (lower/upper)	6 / 3	6 / 3
Type of Linear Actuator	12-volt, IP65 rated	12-volt, IP65 rated
Actuator Stroke (in/mm)	8 / 203	8 / 203
Weight (lbs./kg)	247 / 112	240 / 109
Product No.	811880	811885



**Caution** – A heavy load can cause your power unit to tip over. When moving heavy loads, keep the load as close to the ground as possible, go slowly around turns, and be sure the front or rear of power unit is properly counterbalanced with weights.

**Caution** – Operators must read & understand operator's manual, particularly the safety warnings and instructions. **The operator is responsible for safety of themselves and others when operating equipment.**



WORKSAVER, INC. has a corporate policy of continuous product improvement and development; therefore, specifications are subject to change without any advance notice.

WORKSAVER, INC. is not responsible for differences between specifications or illustrations contained in this publication and the actual equipment.



Distributed by:

**Worksaver, Inc.**

P.O. Box 100, Litchfield, IL 62056-0100

Phone: 217-324-5973 • Fax: 217-324-3356

worksaver.com • E-mail: sales@worksaver.com

**Designed. Engineered. Remarkable Value.**

