

Maximum suggested horsepower

▶ **70 HP**

	Total width
	Working width
	Side-shift
	Min. suggested horsepower
	Weight
	Hammer no.


VEGA/S											Nr.
	IN	CM	IN	CM	IN	CM	HP / KW	LBS	KG		
<b>125</b>	56	142	49	124	25-24 15-35	63-61 38-89	40/29	904	410	12	
<b>150</b>	66	168	59	150	32-27 17-42	81-68 38-89	45/33	1003	455	14	
<b>175</b>	76	193	69	175	32-37 17-52	81-94 38-132	50/37	1113	505	16	
<b>200</b>	86	218	79	200	34-40 23-56	86-101 58-142	60/44	1224	555	18	



www.celli-usa.com  
Toll Free: 1-877-591-4790

# VEGA/S

## SIDE-SHIFT MULTI-PURPOSE MULCHER

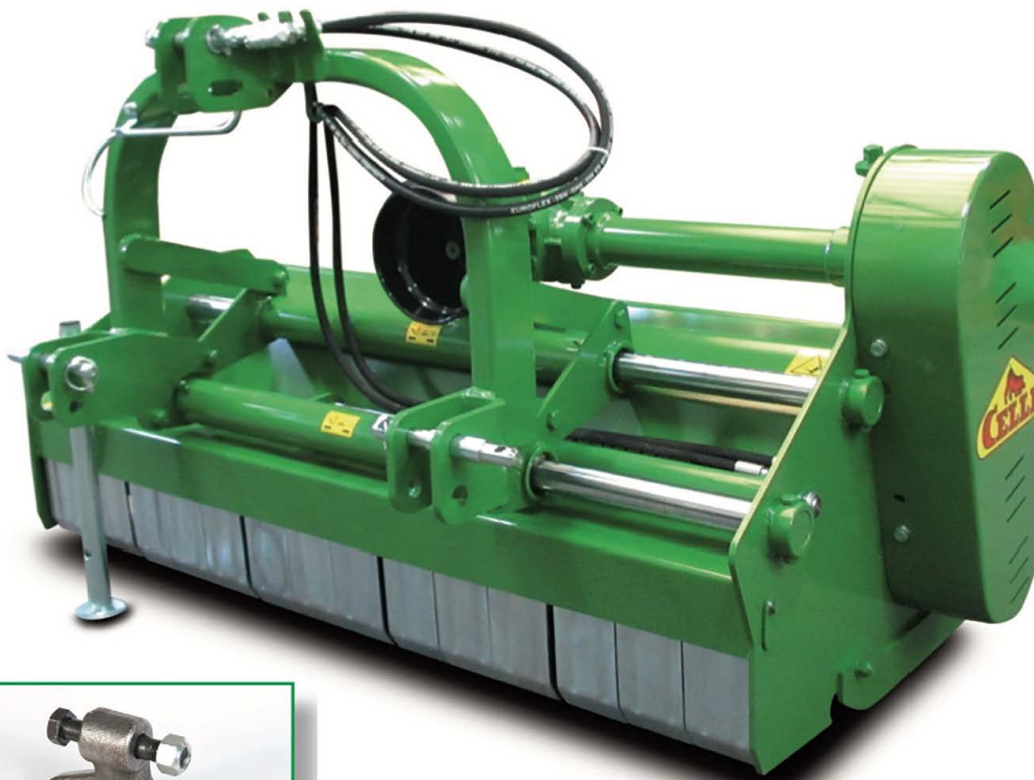

### SIDE-SHIFT MULTI-PURPOSE MULCHER

Suitable for grass, greens, set-aside (1½")

#### TECHNICAL SPECIFICATIONS

- Maximum horsepower: 70HP
- Rotor speed: 2278 rpm (for 540 rpm PTO) tip speed 156 ft/sec
- Side transmission with 3 belts (only model 125)
- Side Transmission with 4 belts (mod. 150-175-200)
- Side-shift mechanism by threaded bar onto 2 chromed plated rods
- fixed counter-blades (front and upper)
- Double 3 point hitch (2 working positions) adjustable in height for 6cm
- Rear roller 7"
- Gearbox with freewheel safety device
- Openable rear door for inspection
- Double shielded box frame
- Side protections
- Rotor (pipe 5½") with flat hammer (total 16")
- Drive shaft without safety device

#### OPTIONAL ACCESSORIES

- 3 Y shaped blades with straight blade
- Set of 2 rear rubber wheels
- Rear collection spike (min/max)  
125=5/9 pcs. 150=6/11 pcs.  
175=7/13 pcs. 200=8/15 pcs.
- Side-skids
- Side skids protections to minimize wear (set of 2)
- Hydraulic side-shift kit



Flat hammer (standard)



Y shaped blades with straight blade (optional)



Roller is separated from side-skids

Suitable for grass, greens, set-aside (1 ½" Diameter)