



Ref. 03.CBR/03.CBTI

Bucket Broom



Bucket Broom

Ref. 03.CBR/03.CBTI



03.CBR - Heavy Duty Bucket Broom




- Manufactured using added thickness, high quality St-52 steel.
- Wear shoes made from special anti-wear steel (450 HB) welded to bottom of bucket.
- Patented adjustment system to limit wear to the brushes: the side is completely clear to reduce the minimum distance from the wall.
- Weld-on lip and side cutters made from high quality 450 HB steel, 16 mm thick.
- Bolt-on, reversible, cutting edge/side cutter combo, made from 450 HB steel, 20 mm thick.
- Direct drive hydraulic motor. (Patented system)
- Direct drive to the shaft (no chain)
- Protective guards around the bearings.

| Model | Overall Width (in.) * | Standard Weight (lbs) | Brush Diameter (in.) | Drive Type |
|-------------|-----------------------|-----------------------|----------------------|------------|
| 03.CBR.1550 | 63.39 | 926 | 23.62 x 7.09 | Direct |
| 03.CBR.1700 | 69.29 | 993 | 23.62 x 7.09 | Direct |
| 03.CBR.1850 | 75.20 | 1058 | 23.62 x 7.09 | Direct |
| 03.CBR.2000 | 82.68 | 1102 | 23.62 x 7.09 | Direct |

* Other widths available



Optional Equipment

- Integrated cowling, rubber side skirts
- All-metal brush
- Side sweeper (3 axis adjustable, floating)
- Water sprinkler dust suppression system (12 volt, 26 gal. tank)

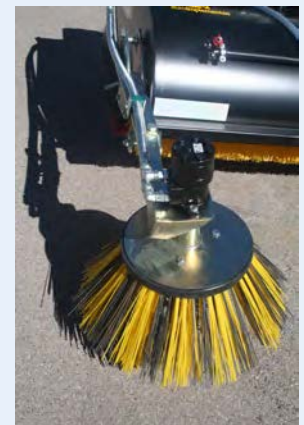

Bucket Broom

Ref. 03.CBR/03.CBTI

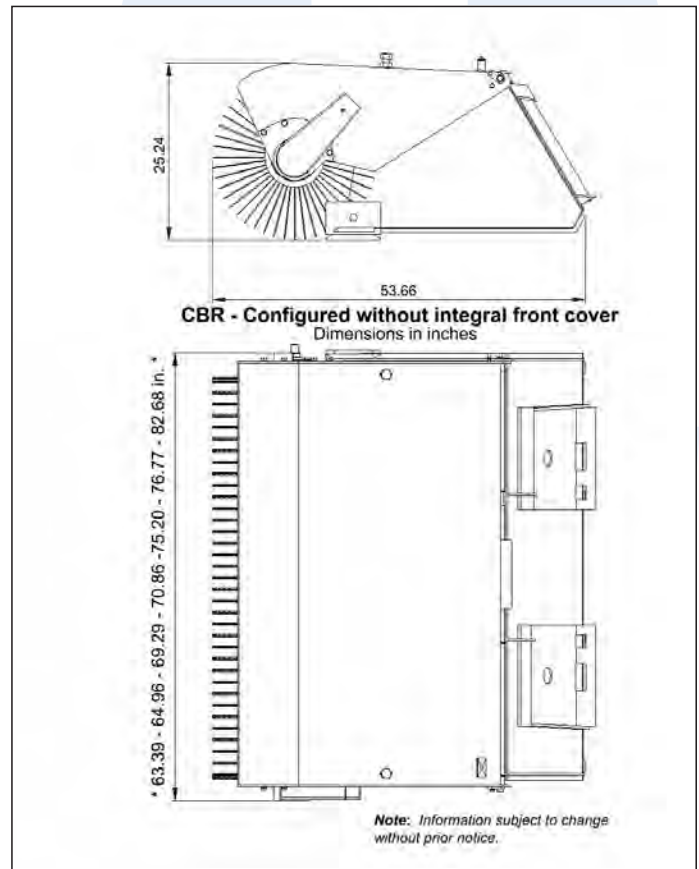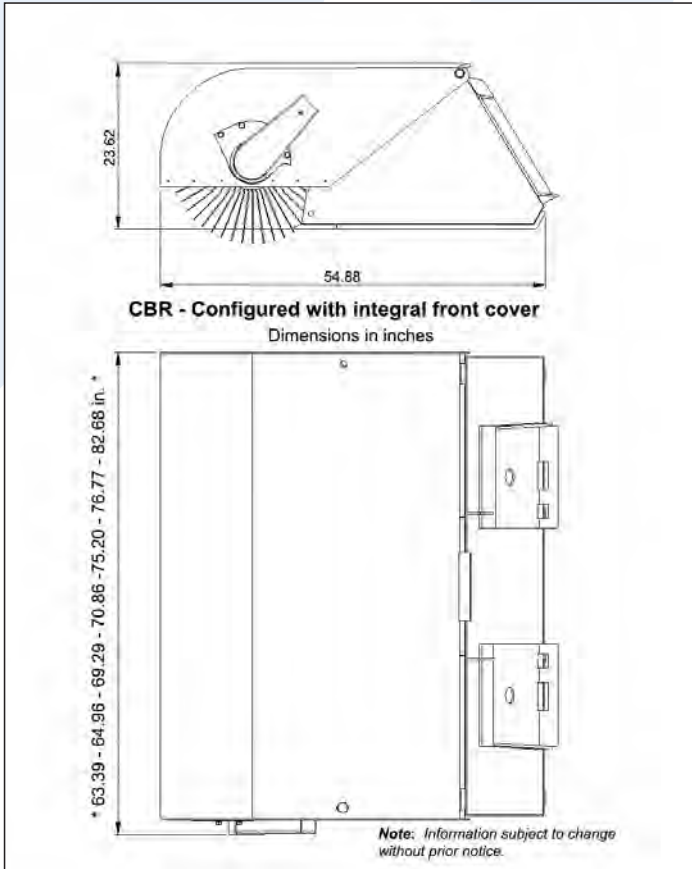

All specifications and technical data subject to change without prior notice.




Bucket Broom

Ref. 03.CBR/03.CBTI

03.CBTI - Covered Bucket Broom



- Cutting edge made using high quality anti-wear steel (450 HB)
- Bolt-on (not welded), reversible, cutting edge.
- Wear shoes made from special hardened steel (450 HB) welded to bottom of bucket.
- Patented adjustment system to limit wear to the brushes: the side is completely clear to reduce the minimum distance from the wall.
- Long lasting polypropylene brushes (more than 8.25 in of usable material)
- Special treatment of surfaces exposed to corrosion.
- Top quality hydraulic motors.
- Widths available up to 106.3 in. (2700 mm)

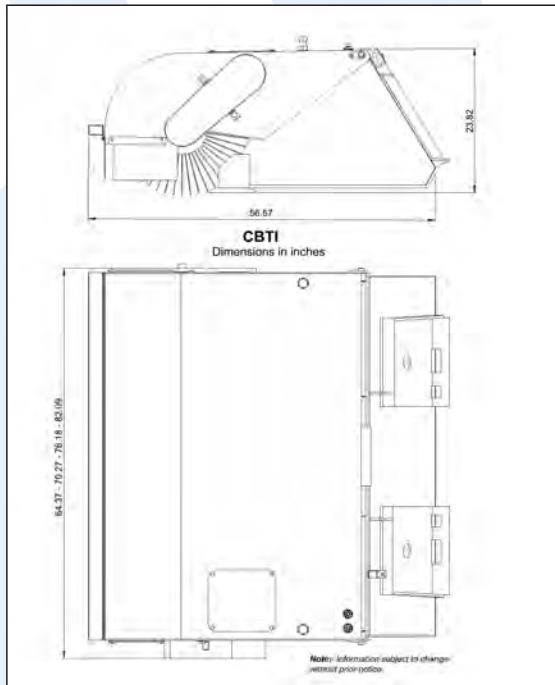

Optional Equipment

- Sprinkler system
- Side sweeper
- Rubber skirts

| Model | Overall Width (in.) * | Standard Weight (lbs) | Brush Diameter (in.)** | Drive Type |
|--------------|-----------------------|-----------------------|------------------------|------------|
| 03.CBTI.1550 | 64.37 | 882 | 21.65 x 5.04 | Chain |
| 03.CBTI.1700 | 70.27 | 926 | 21.65 x 5.04 | Chain |
| 03.CBTI.1850 | 76.18 | 948 | 21.65 x 5.04 | Chain |
| 03.CBTI.2000 | 82.09 | 1014 | 21.65 x 5.04 | Chain |

* Other widths available

** For widths greater than 84.64" the brush diameter is 23.62"



OFFICE
2070 N.W. 79th Ave Suite 204
Miami, FL, 33122
Tel. +1-786-332-4024
info@coneac.com
www.coneac.com



Factory
Pol. Ind. La Pobla, nave 19-21
08260 Súria (BCN) SPAIN
Tel. +34 93 869 40 50 - Fax +34 93 868 25 77
euroimplementos@euroimplementos.com
www.euroimplementos.com



Empresa Certificada
UNE-EN-ISO 9001